

TULSA CHAIN.COM



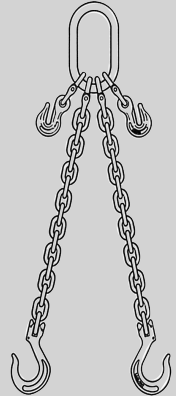
Rigging Superstore



ISO 9001-2000 CERTIFIED








LacledeAlloy® Slings G100

1. Never exceed working load limit
2. Do not tip load hooks
3. Remove all twists, knots, and kinks before lifting
4. Avoid jerking or creating shock loads
5. Use pads to cover sharp corners
6. Do not drop or rest loads on chain
7. Balance loads evenly to avoid excessive forces on chain
8. Keep hands, feet and other body parts from between slings and load
9. Do not field repair a chain sling
10. Destroy a chain sling beyond use if it's not repairable



Working Load Limit in Pounds

G100

G100							
	CHAIN SIZE Inches mm	SINGLE- 90 Lbs. Kg	DOUBLE-60 Lbs. Kg	DOUBLE- 45 Lbs. Kg	DOUBLE-30 Lbs. Kg	TRIPLE/QUAD-60 Lbs. Kg	TRIPLE/QUAD-45 Lbs. Kg
9/32" 7	4,300 1,950	7,400 3,400	6,100 2,750	4,300 1,950	11,200 5,050	9,100 4,150	6,400 2,950
5/16" 8	5,700 2,600	9,900 4,500	8,100 3,700	5,700 2,600	14,800 6,750	12,100 5,500	8,500 3,900
3/8" 10	8,800 4,000	15,200 6,950	12,400 5,650	8,800 4,000	22,900 10,400	18,700 8,500	13,200 6,000
1/2" 13	15,000 6,800	26,000 11,800	21,200 9,600	15,000 6,800	39,000 17,650	31,800 14,450	22,500 10,200
5/8" 16	22,600 10,300	39,100 17,750	32,000 14,500	22,600 10,300	58,700 26,650	47,900 21,750	33,900 15,400
3/4" 20	35,300 16,000	61,100 27,700	49,900 22,650	35,300 16,000	91,700 41,550	74,900 33,950	53,000 24,000
7/8" 22	42,700 19,400	74,000 33,500	60,400 27,350	42,700 19,400	110,900 50,520	90,600 41,050	64,000 29,050